



## Quality and Value

The **Travel Pro** from Pride® brings exceptional value and easy transportation together in a compact, light-weight package. The stylish Travel Pro has a weight capacity of 275 lbs. and disassembles quickly and easily.



Easy disassembly.



**Pride**®  
Mobility Products Corp.  
— LIVE YOUR BEST™ —



### Specifications

Max. weight capacity	275 lbs.
Maximum speed <sup>1</sup>	Up to 4 mph
Ground clearance <sup>2</sup>	1.375"
Turning radius <sup>2</sup>	32.5"
Overall length <sup>2</sup>	37"
Overall width <sup>2,5</sup>	19.5"
<b>Tires</b>	
Front	2" x 8" solid
Rear	2.5" x 8" solid
Anti-tips	Rear
Standard seating	Foldable, compact, vinyl-covered molded plastic
Drivetrain	24-volt DC motor, sealed mini-transaxle
Dual braking system	Electronic, regenerative and electromechanical
Battery charger	Off-board, 2 amp
Per-charge range <sup>1</sup>	Up to 6 miles (w/ 2 x 12 AH)
Battery requirements <sup>3</sup>	(2) 12V deep-cycle (standard)
Compatible batteries	12 AH
<b>Weight</b>	
Batteries (2 required)	12 AH (19.5 lbs. battery pack) <sup>4</sup>
Weight w/o battery pack <sup>2</sup>	3-wheel: 72 lbs.
Heaviest piece <sup>2</sup>	3-wheel: 28 lbs. (front section)
Warranty	5-year limited on frame; 2-year limited on electronics; 1-year limited on motors

### Standard Colors



Red



Blue

### Features

- Easily disassembles into 5 super lightweight pieces for convenient transport and storage
- Sleek, sporty style
- Modular design for easy serviceability
- Front frame-mounted seat post offers maximum stability
- PDAC coded K0800 power operated vehicle


## Silver Star® Lifts & Ramps

These Silver Star® Lifts are compatible with the Travel Pro.

- Backpacker® Plus
- Backpacker® MV
- Power Tote Mini



Full Platform

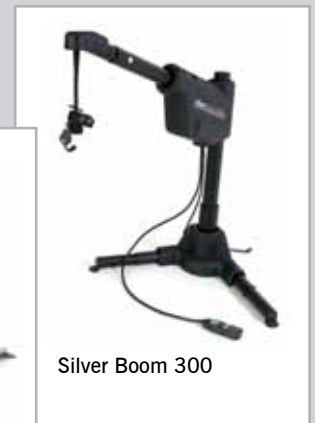

Silver Boom 300

<sup>1</sup>Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tire condition. This specification can be subject to a variance of (+ or -) 10%.

<sup>2</sup>Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or - 3%).

<sup>3</sup>AGM or Gel-Cell type required.

<sup>4</sup>Battery weight may vary based on manufacturer.

<sup>5</sup>Overall scooter width at seat is 22.3".